




SWITCHGEAR INTERLOCK APPLICATIONS

DATA SHEET

ARC FLASH REDUCTION

POWER DISTRIBUTION
POWER GENERATION
POWER TRANSMISSION

Work **SAFE** For **LIFE**™

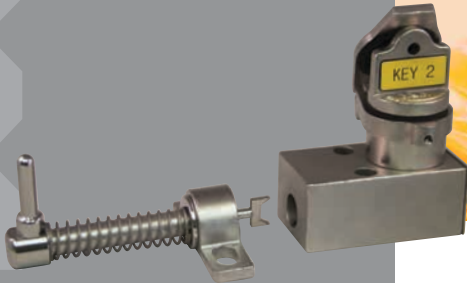

**Type DM Access Interlock
with Spring Bolt**



**Type PPS
Interlock**

Quick-Trip™



Arc flash hazard protection of personnel working on or near energized electrical equipment is crucial. The 2011 NEC standard and the 2014 NEC, Article 240.87, requires arc energy reduction for 1200A or higher rated circuit breakers. An acceptable method to reduce arc energy is a maintenance switch, AC-PRO® Quick-Trip® from Utility Relay Company, which adds a switchable instantaneous trip function to the AC-PRO trip unit with an adjustable pick-up setting. This can reduce the arc flash hazard by reducing the fault interruption time.


Combining Quick-Trip with KIRK® interlocks assures the predetermined sequence of arc flash energy reduction procedures are followed. Personnel can operate at a lower Risk Hazard Category and Personnel Protective Equipment requirements according to NFPA 70E.

A typical arc flash reduction system using KIRK® interlocks and URCs Quick Trip® unit is detailed on the reverse side.

PROCESS SAFETY CONTROL

www.kirkkey.com

INTERLOCKING LOGIC

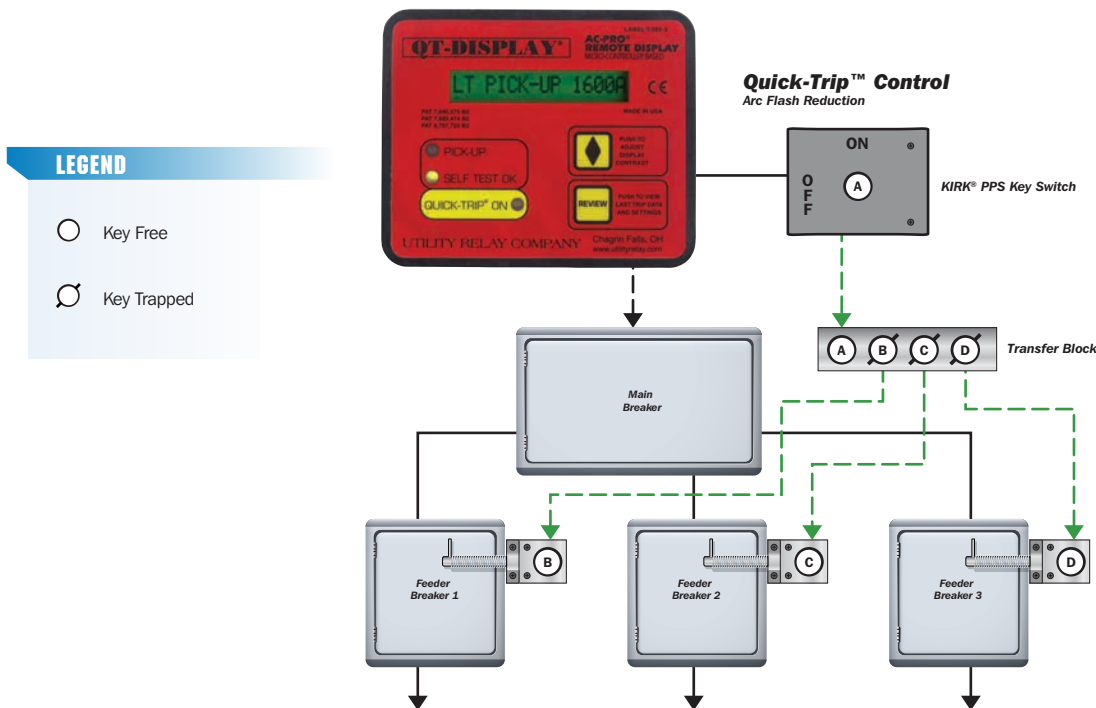

The interlocking logic shown illustrates a typical sequence for racking a feeder breaker.
Note: Personnel safety is improved by assuring the use of Quick-Trip™ during maintenance.

OPERATION

INITIAL SYSTEM STATUS:

Main breaker and feeder breakers are energized. Panel doors are locked closed and Quick-Trip™ Unit is disengaged. Key A is trapped in KIRK® PPS Interlock.

SYSTEM OPERATION:

- 1) Turn Quick-Trip to the ON position at the main breaker by turning and releasing Key A
- 2) Insert Key A in transfer interlock to release keys B, C and D. Key A is now trapped.
- 3) Use Keys B, C and D to unlock the three feeder compartment door interlocks.
- 4) Keys B, C and D are trapped in the door interlock when the compartment door is opened.
- 5) Rack the feeder breaker in or out.
- 6) Reverse the sequence to turn the Quick-Trip to the OFF position at the main breaker.

**INTERLOCKING
SEQUENCES
CAN BE DESIGNED
TO SUIT ANY
OPERATIONAL
OR PROCESS
REQUIREMENTS**

URC Utility Relay Company

CALL TOLL FREE
888.289.2864

For More information,
 visit our website
www.utilityrelay.com

Work **SAFE** For **LIFE**™