


# Hybrid Interlock Item Ordering Guide

## Kirk Key Interlock Company

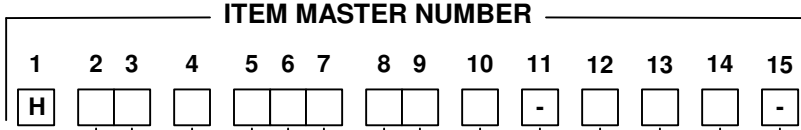

H  
Y  
B  
R  
I  
D

**\* REQUIRED INFORMATION \***

- Type of Interlock (Columns 2 & 3)
- Bolt Projection (measured in withdrawn position) special lengths may be added (Columns 5,6&7)
- Number of Cylinders and Key Removable Positions (Columns 8&9)
- Options desired (where applicable)
- Ultimate End User, name and location
- Key Interchange
- Coordination Requirements
- Quantity

OPTIONS: Where applicable. If none required, leave blank

**NUMBER OF CYLINDERS & KEY REMOVABLE POSITIONS**

**BOLT PROJECTION (in withdrawn position)**

**AUXILIARY SWITCH SELECTION**

**TYPE**

F	L	FLAT MOUNTED (F) - Data Sheet 9.1
B	L	BASE MOUNTED (B) - Data Sheet 9.2
T	R	TRANSFER (T) - Data Sheet 9.3
D	M	ACCESS DOOR (DM) - Data Sheet 9.4
D	L	DOOR MOUNTED (D) - Data Sheet 9.5

**COLUMN 4**

Put "0" in column 4 of part number.  
  
Contact factory if auxiliary contacts are required.

**COLUMNS 5,6,7**

-	-	-	
0	0	0	0", 0mm
0	2	5	1/4", 6.4mm
0	3	7	3/8", 9.5mm
0	5	0	1/2", 12.7mm
0	7	5	3/4", 19.1mm
1	0	0	1", 25.4mm
1	2	5	1-1/4", 31.7mm
1	3	7	1-3/8", 34.9mm
1	5	0	1-1/2", 38.1mm
2	0	0	2", 50.8mm
3	0	0	3", 76.2mm

Be sure to place dashes in columns 5,6 & 7 when ordering T, D or DM interlocks.

**COLUMN 8**

1-CYL	1	0	E
	1	1	W
2-CYL	2	0	E E
	2	1	E W
3-CYL	3	0	E E E
	3	1	E E W
	3	2	E W W

"W" cylinders (if required) will always be located nearest the lock bolt on any multi-cylinder F, B or D interlock. Multi-cylinder DM interlocks will be built with the "W" cylinder (if required) located farthest from the lock bolt.

**COLUMN 9**

**OPTIONS DESCRIPTION**

COLUMN 10	S	STAMP KEY INTERCHANGE See Data Sheets 11.1, 11.3 & 12.1
COLUMN 11	n/a	
COLUMN 12	F	DUST COVER See Data Sheet 11.1
COLUMN 13	M T	HEX MOUNTING BOLTS TAMPERPROOF BOLTS See Data Sheet 11.2
COLUMN 14	P	ADAPTER PLATES See Data Sheets 9.5 & 11.1
COLUMN 15	n/a	


**COLUMNS 5,6,7 TPS ONLY**

5	0	3	2 N/O & 2 NC Contacts, with spacers for flush mount
5	0	4	4 N/O & 4 NC Contacts, with spacers for flush mount

T P PANEL MOUNTED SWITCH (TPS) - Data Sheet 9.6

**TPS ONLY**

**TPS ONLY**



1-CYL	1	0	E
2-CYL	2	0	E E
2-CYL	2	1	W E

OPTIONS: Where applicable (only 10, 12, 13 apply).



**Kirk Key Interlock Company**  
 211 Wetmore Ave S.E., Massillon, Ohio 44646  
 Ph: 330.833.8223 Fax: 330.833.1528  
 Toll Free: 800.438.2442