

SPECIFICATION DATA SHEET 2.1

SKRU - Solenoid Key Release Unit




SKRU - Unhoused




SKRU - Housed
(Front Panel Mounted)

SPECIFICATIONS*:

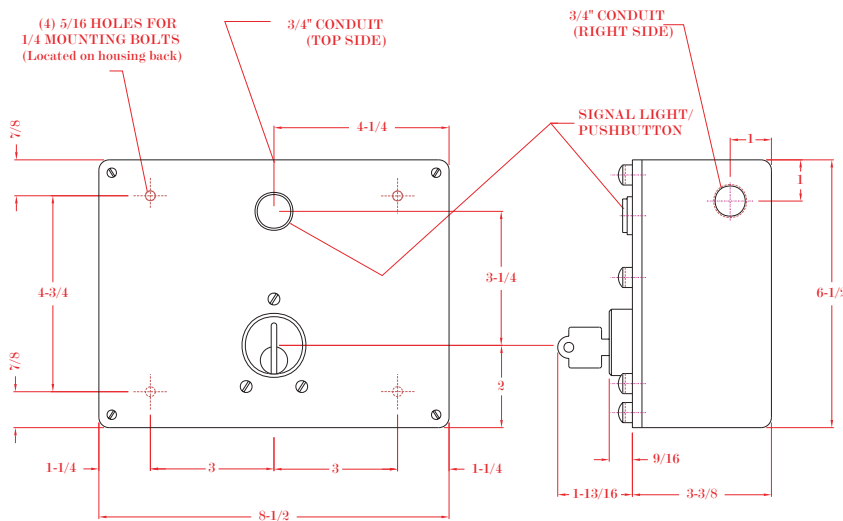

Housed Mounting Options

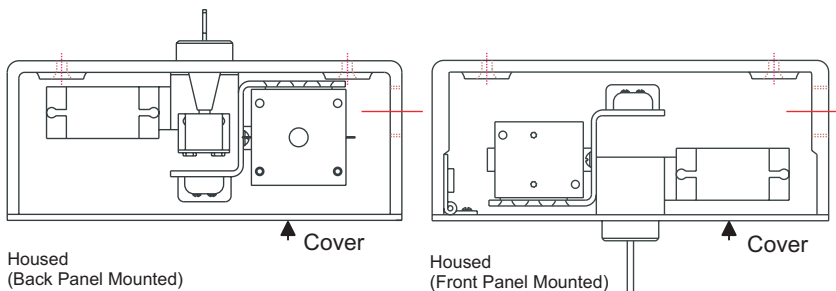

* All Dimensions shown in inches.

Type SKRU Interlock

The SKRU consists of an interlock, a solenoid, and an auxiliary switch. The solenoid is designed to permit removal of the interlock key in response to an electric signal. The auxiliary switch is a quick-make, quick-make device, which operates when the interlock key is rotated.

The SKRU is typically used in combination with other Kirk Key Interlocks.

The SKRU can be built with various mechanical and electrical options. The push button and/or the signal lamp are the most popular options. All components are U/L recognized.

OPTIONS:

- **Mounting Options** - Unhoused, Cover Plate Only, or Housed. The housing and cover plate are aluminum. The housed SKRU is available front panel mounted or back panel mounted. See drawing below.
- **Key Removable** - Energized or De-Energized.
- **Signal Lamp** - Indicates when there is power to the unit.
- **Push Button** - Connected in series with the solenoid, so as to control the operation of the solenoid.
- **Voltage** - 120VAC, 24VDC, or 125 VDC.
- **Auxiliary Switch** - Double pole/double throw (DP/DT) is standard. The DPDT switch is UL recognized and rated 10A 250VAC or VDC, or 15A 125VAC or VDC. Four pole/double throw (4P/DT) is available.
- **Gasket** - For weatherproofing with Housed option.
- **Multi-Cylinder** - Up to 2 cylinders available.
- **Stamp Key Interchange** - Specify an alphanumeric code to be stamped on the cylinder face and the key (e.g. A1, A2, B1, etc). See Data Sheets 3.4 and 4.1 for details.
- **Dust Covers** - See Data Sheet 3.1 for details.

Note: If both the push button and signal lamp are selected as options, the SKRU will be supplied with a combination signal lamp and push button as a single device.

* Visit our website for additional photographs and drawings.

Kirk Key Interlock Company

211 Wetmore Ave. S.E., Massillon, OH 44646
Phone: 330.833.8223 • Fax: 330.833.1528
Toll Free: 1.800.438.2442