

Salvo™

Loading Dock Safety Systems

Operating Procedure for SAMD & SAPD Kits



Step 1

Obtain the red glad hand with key code pertaining to the correct loading dock number (Key code on the glad hand needs to match the Salvo control panel).



Step 2

Remove RED air line from semi trailer.



Step 3

Apply glad hand lock onto red coupling of semi trailer and slide the lever towards the trailer.



Step 4

Remove key from glad hand lock by turning counter-clockwise.




Step 5

Walk to the Salvo control panel located toward the rear of the truck on driver's side.




Step 6

Lift flip cap and insert the key, turn clockwise. (When key is turned the solenoid light with turn on). During this process the warehouse personnel is notified by getting a green light inside the warehouse. Exterior traffic light will stay green until the dock door is open. Once door is open, traffic light will turn red and key will be trapped at the control panel.

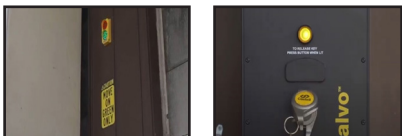

Step 7

Once loading/ unloading is complete and door is closed the exterior traffic light will turn green and the solenoid button will illuminate.

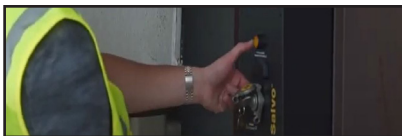

Step 8

To remove the key from the control panel – hold the solenoid button with one finger, and turn the key counter-clockwise with the other hand removing the key.



Step 9

Take the key back to the glad hand, insert and turn clockwise, slide lever down and remove glad hand from red coupling.



Step 10

Return the glad hand to its original place.