


# Salvo™

## Loading Dock Safety Systems

## Operating Procedure for SAMD & SAPD Kits

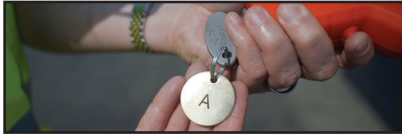

### Step 1

Obtain the red glad hand with key code pertaining to the correct loading dock number (Key code on the glad hand needs to match the Salvo control panel).



### Step 2

Remove RED air line from semi trailer.



### Step 3

Apply the Salvo gladhand by vertically inserting the head of the SGL into the coupling. Push forward and squeeze the two buttons on the sleeve of the gladhand to engage.



### Step 4

While the buttons are pressed, turn the key counter-clockwise to remove the key from the gladhand.



### Step 5

Walk to the Salvo control panel located toward the rear of the truck on driver's side.




### Step 6

Lift flip cap and insert the key, turn clockwise. (When key is turned the solenoid light with turn on). During this process the warehouse personnel is notified by getting a green light inside the warehouse. Exterior traffic light will stay green until the dock door is open. Once door is open, traffic light will turn red and key will be trapped at the control panel.



### Step 7

Once loading/ unloading is complete and door is closed the exterior traffic light will turn green and the solenoid button will illuminate.

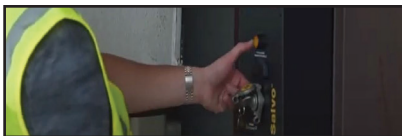

### Step 8

To remove the key from the control panel – hold the solenoid button with one finger, and turn the key counter-clockwise with the other hand removing the key.



### Step 9

Insert the key into the gladhand and turn the key clockwise to remove the gladhand from the coupling.



### Step 10

Return the glad hand to its original place.